



USER MANUAL

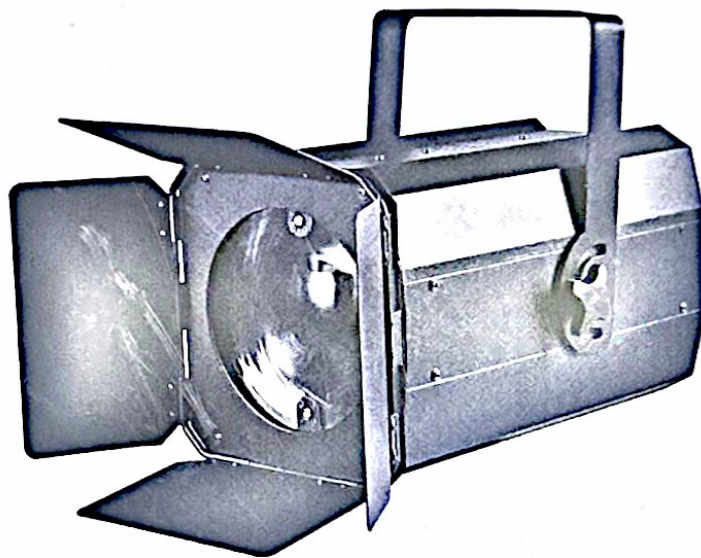

Please read the manual carefully before use

1/1



Please read this manual carefully before operating this product.

Installation and operating instructions:

- (1) Plugged into a grounded power outlet.
 - (2) Install the equipment in a well-ventilated place at least 50cm from any surface, and ensure that the ventilation slots are not blocked.
 - (3) Disconnect the equipment from the power supply before any operation.
 - (4) The ambient temperature should not exceed 40°C, and the maximum ambient temperature is 45°C. Don't operate the device at higher temperatures.
 - (5) The equipment should be stopped immediately, if a fault occurs, and do not repair the equipment by yourself. Improper maintenance can result in damage and malfunction. Contact technical support for repair approval. Only the same accessories can be used with the original parts, and make sure the power cord is not blocked or damaged.
 - (6) Do not expose your eyes to light sources, which can be a sign of a seizure in sensitive people.
 - (7) The lamps are only used for decoration and not suitable for ordinary household lighting.
 - (8) Replacing the fuse: Unplug the device from the power supply, remove the fuse holder from its original position with a screwdriver, take out the burnt fuse, replace the fuse with the same characteristics, then re-rotate the screw, and connect the device to the power supply superior.
 - (9) WARNING: Stop using it if the fuse is still blowing after being replaced. Please contact customer support for further instructions, continued use may cause serious damage.
 - (10) Fix the equipment with the screw holes on the bracket to ensure that the equipment is firmly fixed to prevent vibration and movement during operation, and always check whether the structure of the equipment is strong enough to withstand equipment that is at least ten times.
 - (11) The equipment must be fixed by professionals in places that elders and children cannot reach, and no one can pass under or over the pedestrian crossing.
 - (12) End-of-life of the product: This sign indicates that this product should not be thrown into household waste in European Community countries and that waste should be recycled to support the sustainable recycling of resources in order to protect the environment and human health Utilize. If you need to recycle used electrical appliances, please go to an electrical appliance collection center or contact the dealer where you purchased the product to ensure the ecological recycling of the product.
 - (13) Before cleaning the device, disconnect it from the power source if connected. Do not use harsh cleaners.
- Wipe off dust or dirt from the product with a clean cloth.
- We are not responsible for damage caused by incorrect handling, improper use or wear and tear.
- (14) We reserve the right to make technical modifications.

Technical parameters:


Voltage: AC90-220 V, 50-60 Hz

Light source: 1PCS

Channel: 8CH

Control mode: DMX512, Sound Activated, master-slave, auto.

1. Key button description



MENU UP DOWN ENRTR

MENU: function key

UP: numerical value plus

DOWN: numerical value minus

ENRTR: confirmation key

Operation instructions: Pressing the function key MENU will cycle out 10 different functional effects, and the first two digits of the digital tube represent the current function (refer to the menu). The last two digits represent the address code or speed parameter where the function is located. Press the UP or DOWN key to modify its parameter values. Press the ENRTR key to confirm.

2. Digital tube display menu description

Serial Number	display	numerical value	Function Description
1	D001	001-512	DMA address code, (001-512) B, C keys plus or minus address code values
2	CC00	01-99	Self moving mode 1
3	CP00	01-99	Self moving mode 2
4	DE00	01-99	Self moving mode 3
5	BEBE	-	Audio Mode
6	H000	0-255	focusing
7	HP01	0-255	Focusing speed setting
8	R000	0-255	Warm white brightness setting
9	G000	0-255	True white brightness setting
10	REST	-	reset

2. DMX512Control:

Channel 1	0-255	Total dimming
Channel 2	0-255	Warm color dimming, from dark to bright
Channel 3	0-255	True white dimming, from dark to bright
Channel 4	0-255	Strobe
Channel 5	0-50	No function
	51-150	Self-propelled mode

	151-255	Audio Mode
Channel 6	0-255	Self moving speed setting, from slow to fast
Channel 7	0-255	focusing
Channel 8	0-250	Focusing speed
	250-255	reset

3. Functional features:

Color temperature: 3200/5600K. The operation is very simple, user-friendly design, dimming without flickering, shaking, and other phenomena. Suitable for photography, photography, television stations and other occasions with strict lighting requirements.